

## REDEFINE SPECULAR

The P360 from Fiilex LED is a powerhouse in portable and compact lighting. This open-faced LED light fixture gives you intense specular output that allows you to shape or soften your light as necessary for the specific job at hand. The P360 boasts high functionality by harnessing Dynamic Color Tuning Technology, allowing you to move freely between different temperature light sources and take on the diverse world of existing ambient light. For image makers that demand portable lighting but aren't willing to sacrifice quality, the P360 can tackle a multitude of situations without the limiting drawbacks of conventional lighting technology.



## FEATURES


- Highly Portable Specular LED Light
- 350W Output Equivalent, only uses 90W
- Tunable CCT from 3000-5600 Kelvin
- Broadband Full Spectrum LED Source
- CRI >92 over all Color Temperatures
- Dimming from 10 - 100%
- AC/DC Power Options (Battery Ready)
- Long Lifespan, No Bulbs to Replace
- Lightweight, Compact, and Easy for Travel
- Compatible with Existing Light Modifiers
- Virtually Heat Free & Cool to the Touch
- Flicker Free at Any Frame Rate
- Simple to Use Magnetic Accessory Mount
- Designed in USA, Assembled in USA/Taiwan

Powered By





## FULL SPECTRUM COLOR TUNING

The P360 has the ability to smoothly tune the spectrum of light, producing any color temperature of white light between 3000 - 5600K (Tungsten to Daylight) with an unbelievably high CRI.


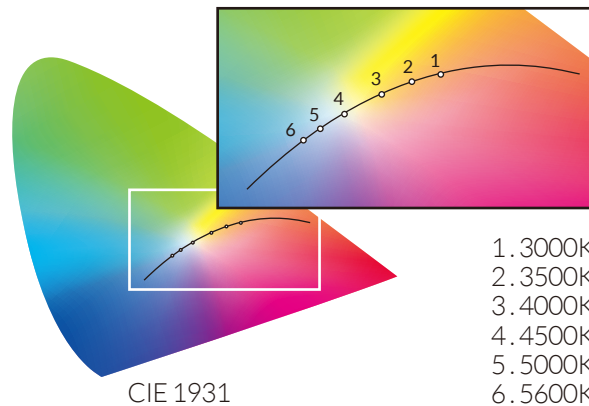


1. 3000K
2. 3500K
3. 4000K
4. 4500K
5. 5000K
6. 5600K



CRI Measurement	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	CRI Ra	CRI Extended	TLCI Results
3000K	94	95	94	94	95	97	97	93	87	99	92	96	94	95	94	95	95	98
5600K	96	96	88	89	96	95	91	89	84	90	89	91	98	93	94	93	92	98

## PHOTOMETRIC DATA

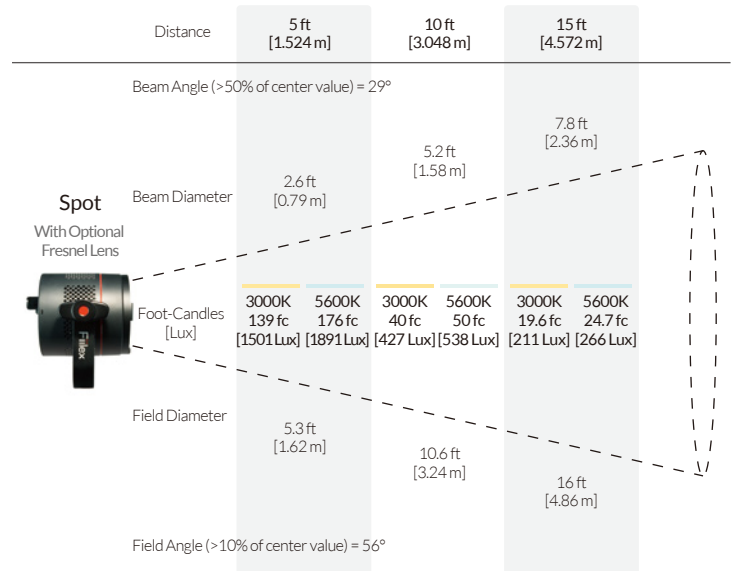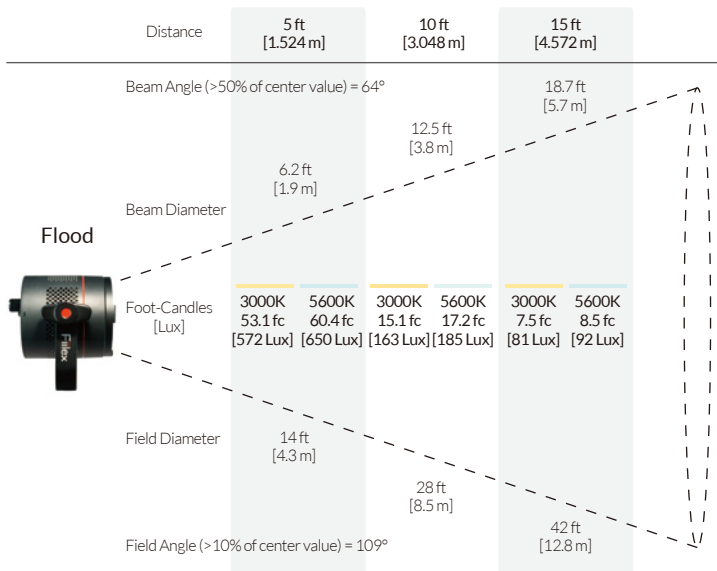

## SPECIFICATIONS

Size (without Barndoor)	4" (Diameter) x 4.7" (Length)
Weight (Includes Yoke)	1.6 lbs / 0.74 kg
LED	Dense Matrix LED
Thermal Design	Advanced Vapor Cooling System
CCT Range	Continuous from 3000K to 5600K
CRI	>92
Power Consumption	90W Max / Comparable in Output to 350W Tungsten
Power Input	12 to 28 V DC
AC Adapter	100-240V AC, 50/60Hz (In) / 24V DC, 90W max. (Out)
Operating Temperature	32 to 104°F / 0 to 40 °C

## OPTIONS

The P360 is available in a variety of travel kits.



A variety of light modifiers and accessories are available for the P360. Find the rest on our website



Dome Diffuser



Fresnel Lens



Soft Box

Visit [www.fiilex.com](http://www.fiilex.com) for more info.

